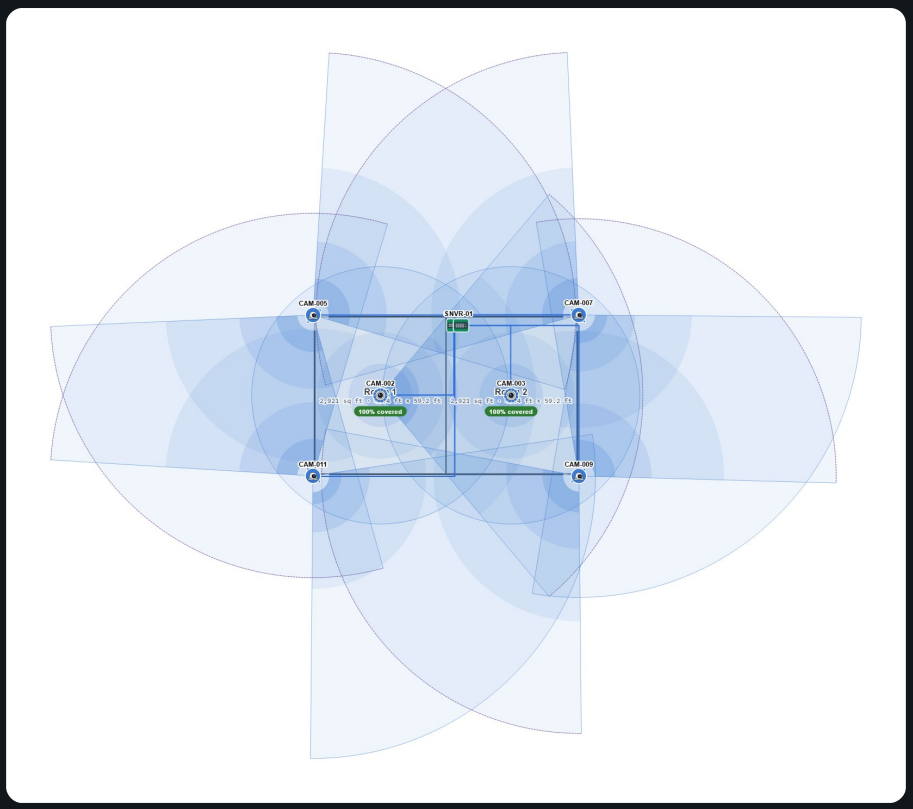


Security system proposal

QA msedge 20261015T1631 Main workflow

QA Customer (disposable) · 1201 Houston St, Fort Worth, TX

11	0	13
cameras	secured doors	devices

Prepared 10/15/2026 · Revision A

QA msedge 20261015T1631 Main workflow

QA Customer (disposable) · 1201 Houston St, Fort Worth, TX

Prepared 10/15/2026 · Revision A

Scope of work

- Furnish and install 11 security cameras (1 dome camera, 2 fisheye cameras, 6 turret cameras, 2 bullet cameras), covering Room 1, Room 2. Mount, aim and focus each camera to the coverage shown on the drawings and verify day and night images.
- Provide 16-ch NVR with 30 days of retention, configured for remote viewing on the customer's phones and computers.
- Install and label approximately 1,159 ft of low-voltage cabling with service loops, terminated and tested end to end.
- Provide as-built drawings, device schedule with IP addresses, and owner training on completion.

Exclusions: line-voltage electrical work, patching and painting, lifts beyond 20 ft, permits and fees unless listed, and work not shown on the drawings.

Investment options

	Essentials Cameras and recording only	RECOMMENDED FOR YOU Recommended Everything in this design
Total	**$9,500.00**	**$12,500.00**
Monthly service	—	—
Deposit to start	$4,750.00	$6,250.00

Choose one option.

Payment schedule

50% deposit to order equipment and schedule ($6,250.00), balance ($6,250.00) on completion.

Design notes & assumptions

- Scale — Building A · Floor 1: Set by two-point calibration (100 ft between two points, 10/15/2026) · 1 dimension check, worst +0.0%.
- Cameras: 11, mounted 9.5–12 ft high as shown; ceiling height assumed 10 ft.
- Coverage target: 90% of each required room at its level (IEC 62676-4 pixel density: detect 25, observe 62.5, recognize 125, identify 250 px/m).
- Recording: 30 days, H265, 15 fps, continuous — about 10.4 TB.
- Products: 3 models checked against manufacturer datasheets, 4 generic placeholders to confirm.
- Coverage is a 2-D estimate from the plan. Shelving, signage, trees, lighting and glare that are not drawn are not modelled — verify on site.

Acceptance

Customer signature

Date

Prices are valid for 30 days. Specifications per manufacturer datasheets; final quantities confirmed at site survey.